



Specification

Z-Wave PHY test specification

Version:	2.0
Description:	Test case descriptions for the Z-Wave Alliance PHY layer
Written By:	CSWG
Date:	2022/04/21
Reviewed By:	CSWG
Restrictions:	Public

Approved by:

Technical Committee

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the Specification set forth in this document, and to provide supporting documentation.

THIS SPECIFICATION IS BEING OFFERED WITHOUT ANY WARRANTY WHATSOEVER, AND IN PARTICULAR, ANY WARRANTY OF NON-INFRINGEMENT IS EXPRESSLY DISCLAIMED. ANY USE OF THIS SPECIFICATION SHALL BE MADE ENTIRELY AT THE IMPLEMENTER'S OWN RISK, AND NEITHER THE ALLIANCE, NOR ANY OF ITS MEMBERS OR SUBMITTERS, SHALL HAVE ANY LIABILITY WHATSOEVER TO ANY IMPLEMENTER OR THIRD PARTY FOR ANY DAMAGES OF ANY NATURE WHATSOEVER, DIRECTLY OR INDIRECTLY, ARISING FROM THE USE OF THIS SPECIFICATION..

REVISION RECORD

Doc. Rev	Date	By	Pages affected	Brief description of changes
0.1	2020/03/30	CSWG	ALL	Initial version
0.5	2020/04/07	CSWG	Sections: 1, 3.15	Inputs from initial review added: Added abbreviations, clarified test description
0.7	2020/09/23	CSWG	All	Re-formatted for Z-Wave Alliance
0.8	2021/03/01	CSWG	None	Revision updated to 0.8 for TC review
0.9	2021/03/30	CSWG	Frontpage Section 3.2.3 Section 3.4.3 Section 3.6.3 Figures 2,3,4,5,6,16,18	Cleanup for IPR review <ul style="list-style-type: none"> Removed reference to ITU table 7-2 from text Corrected formula for BT calculation Corrected reference to ITU section 7.1.2.5.2 (was wrongly 7.7.2.5.2) Corrected spelling of the word separation in all figures
1.0	2021/08/27	ZWA Board		Approved for publication
1.5	2021/08/30	CSWG	Font page 3.2.4 3.3.2 3.3.6 3.4.2 Figure 3 3.4.3 3.4.4 3.4.5 3.4.6 Figure 4 3.5.2 3.5.4/3.5.5 3.6.2 3.7.4/3.7.5 3.8 3.8.6 3.10.4/3.10.5 3.10.6 3.11.4/3.11.5 3.12.1 3.12.2 3.13/3.14/3.15/3.16 4	<p>Added disclaimer to front page</p> <p>Added 10ppm to pass criteria for crystal precision</p> <p>Added possibility to test fewer RF profiles</p> <p>Added section to describe acceptable measurement precision</p> <p>Added possibility to test fewer RF profiles</p> <p>Replaced drawing and removed markers on drawing</p> <p>Removed BT calculation</p> <p>Rephrased pass criteria for BT measurement</p> <p>Removed criteria #3</p> <p>Added text about acceptable transient over/under shoot.</p> <p>New drawing to show acceptable transient over/under shoot.</p> <p>Added possibility to test fewer RF profiles</p> <p>Removed criteria #3</p> <p>Added possibility to test fewer RF profiles</p> <p>Changed FER calculation (rephrased).</p> <p>Specified which RF profiles the test is valid for</p> <p>New section added describing the tested threshold for CCA test.</p> <p>Changed FER calculation (rephrased).</p> <p>New section added to describe that one offset is allowed to fail.</p> <p>Changed FER calculation (rephrased).</p> <p>Changed wording to clarify subject</p> <p>Added section to allow for alternative measurement setup</p> <p>Test in this section pushed to MAC test</p> <p>New section added with frequencies and data-rates.</p> <p>Corrected ITU table names from x.y to x-y.</p> <p>Corrected wordings "must" to "should" in setup descriptions</p>
1.7	2021/12/06	CSWG	Revision	Approved by CSWG for TC review
1.9	2021/12/15	CSWG	Revision	Approved without comments by TC on meeting December 15, 2021. Updating to version 1.9
2.0	2022/04/21	ZWA Board		Approved for publication

Table of Contents

1	ABBREVIATIONS.....	6
2	INTRODUCTION.....	6
2.1	Purpose.....	6
2.2	Audience and prerequisites	6
3	PHY TEST CASE DESCRIPTIONS	7
3.1	General assumptions	7
3.2	RF profiles	8
3.2.1	Prerequisites	8
3.2.2	Measurement setup	8
3.2.3	Measurement result	8
3.2.4	Pass criteria.....	9
3.2.5	Fail criteria	9
3.3	Symbol rates	10
3.3.1	Prerequisites	10
3.3.2	Measurement setup	10
3.3.3	Measurement result	11
3.3.4	Pass criteria.....	11
3.3.5	Fail criteria	11
3.3.6	Exception	11
3.4	Modulation and encoding	12
3.4.1	Prerequisites	12
3.4.2	Measurement setup	12
3.4.3	Measurement result	13
3.4.4	Pass criteria.....	14
3.4.5	Fail criteria	14
3.4.6	Exception	14
3.5	Symbol mapping	15
3.5.1	Prerequisites	15
3.5.2	Measurement setup	15
3.5.3	Measurement result	17
3.5.4	Pass criteria.....	17
3.5.5	Fail criteria	17
3.6	Transmit power adjustment.....	18
3.6.1	Prerequisites	18
3.6.2	Measurement setup	18
3.6.3	Measurement result	18
3.6.4	Pass criteria.....	19
3.6.5	Fail criteria	19
3.7	Receiver sensitivity.....	20

3.7.1	Prerequisites	20
3.7.2	Measurement setup	20
3.7.3	Measurement result	21
3.7.4	Pass criteria.....	21
3.7.5	Fail criteria	21
3.8	Clear channel assessment.....	22
3.8.1	Prerequisites	22
3.8.2	Measurement setup	22
3.8.3	Measurement result	23
3.8.4	Pass criteria.....	24
3.8.5	Fail criteria	24
3.8.6	Exception	24
3.9	Receiver spurious requirement	25
3.9.1	Prerequisites	25
3.9.2	Measurement setup	25
3.9.3	Measurement result	25
3.9.4	Pass criteria.....	25
3.9.5	Fail criteria	26
3.10	Receiver blocking	27
3.10.1	Prerequisites	27
3.10.2	Measurement setup	27
3.10.3	Measurement result	28
3.10.4	Pass criteria.....	28
3.10.5	Fail criteria	29
3.10.6	Exception	29
3.11	Receiver saturation	30
3.11.1	Prerequisites	30
3.11.2	Measurement setup	30
3.11.3	Measurement result	31
3.11.4	Pass criteria.....	31
3.11.5	Fail criteria	31
3.12	TX to RX turnaround time.....	32
3.12.1	Prerequisites	32
3.12.2	Measurement setup	32
3.12.3	Measurement result	33
3.12.4	Pass criteria.....	33
3.12.5	Fail criteria	34
3.13	RX-to-TX turnaround time	35
3.14	Preamble field	36
3.15	Start of Frame field.....	37
3.16	End of Frame field	38
REFERENCES		39
4 APPENDIX		40
4.1	Frequency, channel, and data rate overview	40

Table Of Figures

Figure 1, Data rate measurement	11
Figure 2, Modulation format measurement, FSK Data Rate R1 and R2.	13
Figure 3, Modulation format measurement, GFSK Data Rate R3	13
Figure 4, Frequency under/overshoot exception	14
Figure 5, Symbol mapping measurement, FSK Data Rate R1, Manchester Coding.	16
Figure 6, Symbol mapping measurement, FSK Data Rate R2, NRZ coding	16
Figure 7, Symbol mapping measurement, FSK Data Rate R3, NRZ coding	17
Figure 8, Sensitivity measurement setup	20
Figure 9, Clear channel assessment measurement setup	22
Figure 10, CCA spectrum analyzer measurement	23
Figure 11, Blocking measurement setup	28
Figure 12, Receiver saturation measurement setup	30
Figure 13, TX-to-RX turnaround time setup	32
Figure 14, TX-to-RX turnaround measurement result.....	33

1 ABBREVIATIONS

Abbreviation	Explanation
BT	The filter coefficient in a Gaussian filter
CW signal	Carrier Wave (RF) signal
DUT	Device Under Test
FER	Frame Error Rate
SOF	Start of Frame

2 INTRODUCTION

2.1 Purpose

The purpose of this document is to outline a series of test cases which can prove, that an implementation of the Z-Wave protocol on a non-Silicon Labs chip / device adheres to the requirements given in the ITU specification ITU G.9959.

The test cases described in the following sections are not detailed descriptions. The purpose of the descriptions is to be able show what is needed and to discuss how it can be obtained, and once a suitable level of understanding is found, the work detailing the individual tests can begin.

2.2 Audience and prerequisites

Test Body / test lab with the capabilities to perform detailed RF measurements and with the experience of conducting measurements according to e.g. Bluetooth / Zigbee / Thread standards.

3 PHY TEST CASE DESCRIPTIONS

The test cases described in this section are all referring to the PHY requirements stated in the ITU specification: ITU-T G.9959 (01/2015):

3.1 General assumptions

All references to tables in ITU-T G.9959 (01/2015) in the following sections will be preceded an ITU header, e.g. ITU table 7-5 will refer to the table 7-5 in the document ITU-T G.9959 (01/2015).

All references to sections in ITU-T G.9959 (01/2015) in the following sections will be preceded an ITU header, e.g. ITU section 7.1.2.5.2 will refer to section 7.1.2.5.2 in the document ITU-T G.9959 (01/2015).

It is assumed, that a Z-Wave device can transmit a modulated RF signal according to the ITU-T G.9959 (01/2015) with any data content as well as a non-modulated signal, a Carrier Wave signal (CW signal) at an RF frequency identical to $f_{\text{center_frequency}}$ according to ITU-T G.9959 (01/2015) ITU table 7-5 and 7-6.

3.2 RF profiles

A Z-Wave device must support all RF profiles as defined in ITU table 7-1.

The RF frequency for all RF profiles must be measured.

3.2.1 Prerequisites

1. A Z-Wave device capable of transmitting a CW signal.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A method to initialize the transmitted RF frequency of the Z-Wave device, or pre-programmed Z-Wave devices to cover all RF profiles as listed in ITU table 7-1.
4. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.

3.2.2 Measurement setup

The Z-Wave device must be initialized to transmit a constant carrier wave RF signal at each RF profile as defined in ITU table 7-1

The Z-Wave device must be connected to a spectrum analyzer with a coaxial cable.

The spectrum analyzer should be initialized to:

Table 1, RF Profile Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	200kHz
Resolution Bandwidth	1kHz
Video Bandwidth	Auto
Amplitude reference level	10dBm
Detector type	Average

The RF frequency of each RF profile must be measured using the “Peak search” feature of the spectrum analyzer.

3.2.3 Measurement result

The measurement result of the test is the measured RF frequency for each RF profile.

The RF frequency for each RF profile may not differ more than the accuracy given in ITU section 7.1.2.5.1.

This accuracy is given as a maximum allowed frequency deviation after 5 years of operation and under extreme temperature conditions.

3.2.4 Pass criteria

The Z-Wave device shall pass the test if:

1. All RF frequencies as stated in ITU table 7-1 could be measured.
2. All RF frequencies measured are within the accuracy limits stated in ITU table 7-2 / ITU section 7.1.2.5.1. The accuracy measured should be better than +/-12ppm (12ppm is what is expected to be a reasonable initial tolerance of a crystal excluding aging and temperature tolerances).

3.2.5 Fail criteria

The Z-Wave device shall fail the test if:

1. A frequency as defined in ITU table 7-1 could not be initialized by the Z-Wave device and not measured in the measurement setup.
2. A frequency measured on the Z-Wave device was measured to be less accurate than stated in ITU table 7-2 / ITU section 7.1.2.5.1.

3.3 Symbol rates

A Z-Wave device must support all the symbol rates / data rates as defined in ITU table 7-2 and at each of the RF profiles as shown in ITU table 7-1.

The modulation parameters for each data rates are given in ITU tables 7-4, 7-5 and 7-6

The data rates for the RF profiles listed in ITU table 7-1 must be measured and verified.

3.3.1 Prerequisites

1. A Z-Wave device capable of transmitting a stream of modulated 0 and 1 symbols at the rates defined in ITU table 7-2 and the modulation properties given in ITU tables 7-4, 7-5 and 7-6.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A method to initialize the transmitted modulation type of the Z-Wave device, or pre-programmed Z-Wave devices to cover all listed RF profiles and data rates as listed in ITU table 7-1.
4. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.
5. An analog demodulator option installed on the spectrum analyzer with the capabilities of at least Keysight option “N9063A Analog Demod Measurement”.

3.3.2 Measurement setup

The Z-Wave device must be initialized to transmit a constant stream of modulated RF signal at each RF profile as defined in ITU table 7-1. If test 3.2 pass, this test can be reduced to the following RF profiles: 1-3, 4-6 and 19-21 as defined in ITU table 7-1.

The Z-Wave device must be connected to a spectrum analyzer with a coaxial cable.

The spectrum analyzer should be initialized to:

Table 2, Symbol Rate Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	Zero Span
Resolution Bandwidth	1MHz
Video Bandwidth	Auto
Amplitude reference level	10dBm
Detector type	Average
Analog demodulation type	FSK
Demodulation time (time across screen)	Depending on the symbol rate
IF filter	700 kHz
Trigger option	RF burst

The symbol rate of each RF profile must be measured using the marker features of the spectrum analyzer:

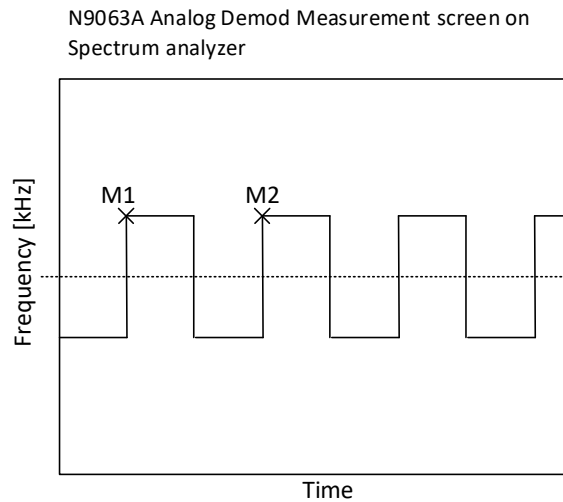


Figure 1, Data rate measurement

3.3.3 Measurement result

The measurement result of the test is the measured time for two transmitted symbols divided by two.

The measured symbol time may not differ more than $1 / (\text{nominal symbol rate}) \pm$ the accuracy as given in ITU table 7-2.

This accuracy is given as a maximum allowed frequency deviation after 5 years of operation and under extreme temperature conditions.

3.3.4 Pass criteria

The Z-Wave device shall pass the test if:

1. The correct symbol rate for each RF profile as stated in ITU table 7-1 could be measured.
2. All symbol rates are within the accuracy limits as stated in ITU table 7-2.

3.3.5 Fail criteria

The Z-Wave device shall fail the test if:

1. A frequency as defined in ITU table 7-1 could not be initialized by the Z-Wave device and not measured in the measurement setup.
2. The accuracy of a measured symbol rate did not pass the specification as given in ITU table 7-2.

3.3.6 Exception

In case the measurement device used to verify the symbol rate is not able to measure with a precision as stated in ITU table 7-2, the measured precision of the symbol duration must be $< 1/25^{\text{th}}$ of the nominal symbol duration.

3.4 Modulation and encoding

Data transmitted by a Z-Wave device must be modulated according to the ITU tables 7-4, 7-5 and 7-6

The modulation parameters for each of the data rates listed in ITU table 7-4 must be measured and verified.

3.4.1 Prerequisites

1. A Z-Wave device capable of transmitting a stream of modulated 0 and 1 symbols at the rates defined in ITU table 7-2 and the modulation properties given in ITU tables 7-4, 7-5 and 7-6.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A method to initialize the transmitted modulation type of the Z-Wave device, or pre-programmed Z-Wave devices to cover all listed RF profiles and data rates as listed in ITU table 7-1.
4. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.
5. An analog demodulator option installed on the spectrum analyzer with the capabilities of at least Keysight option "N9063A Analog Demod Measurement".

3.4.2 Measurement setup

The Z-Wave device must be initialized to transmit a constant stream of modulated RF signal at each RF profile as defined in ITU table 7-1. If test 3.2 pass, this test can be reduced to the following RF profiles: 1-3, 4-6 and 19-21 as defined in ITU table 7-1.

The Z-Wave device must be connected to a spectrum analyzer with a coaxial cable.

The spectrum analyzer should be initialized to below settings or similar:

Table 3, Modulation and encoding Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	200kHz
Resolution Bandwidth	1kHz
Video Bandwidth	Auto
Amplitude reference level	10dBm
Detector type	Average
Analog demodulation type	FSK
Demodulation time (time across screen)	200us
IF filter	700 kHz
Trigger option	RF burst

The modulation properties of each data rate must be measured using the marker features of the spectrum analyzer and the readings of the spectrum analyzer:

N9063A Analog Demod Measurement screen on
Spectrum analyzer

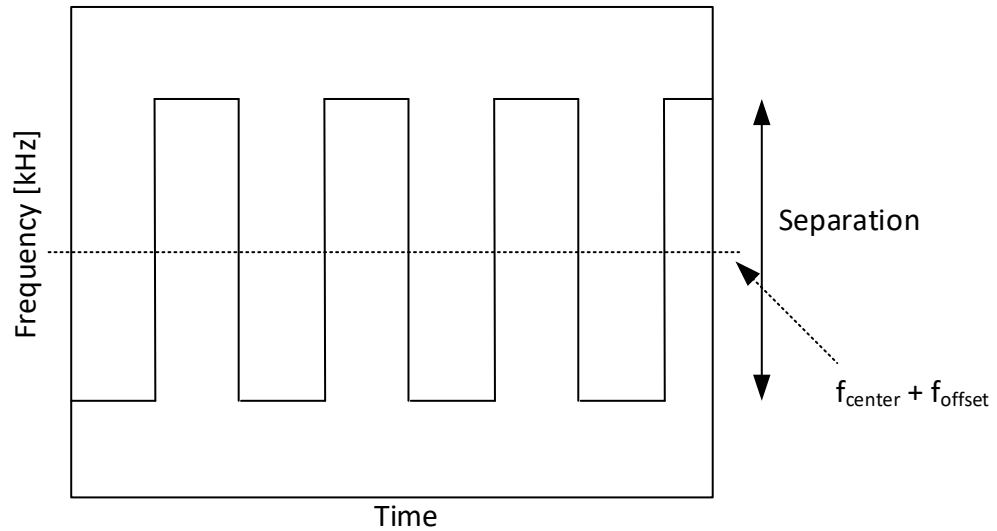


Figure 2, Modulation format measurement, FSK Data Rate R1 and R2.

N9063A Analog Demod Measurement screen on
Spectrum analyzer

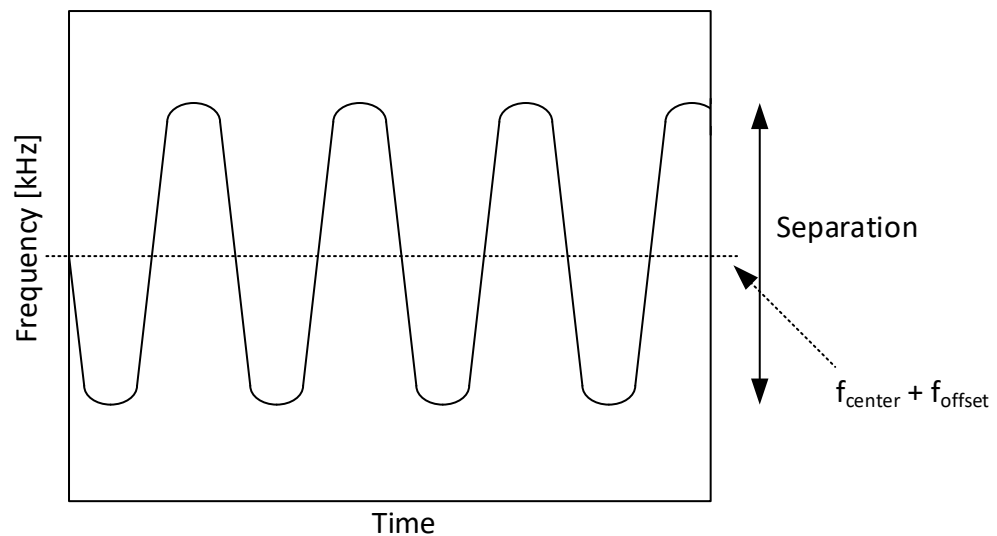


Figure 3, Modulation format measurement, GFSK Data Rate R3

3.4.3 Measurement result

For data rates R1, R2 and R3 the measurement result of the test is measured frequency separation and the $f_{\text{center}} + f_{\text{offset}}$.

For data rate R3, a further measurement result is the BT ratio.

The measured values must be within the limits given by ITU table 7-4.

3.4.4 Pass criteria

The Z-Wave device shall pass the test if:

1. For data rates R1, R2 and R3: At no time within the duration of a symbol may the frequency of the symbol exceed the requirements of the Separation as given in ITU table 7-4.
2. For data rates R1, R2 and R3: The measured $f_{\text{center}} + f_{\text{offset}}$ must be measured to match what can be calculated for the particular data rate with the precision as stated in ITU table 7-2.
3. For data rate R3, the BT_{ratio} must be measured to value 0.6, but the BT value is practically impossible to measure. A device with a wrong BT will either fail local RF regulatory TX tests or have a poor sensitivity.

3.4.5 Fail criteria

The Z-Wave device shall fail the test if:

1. For data rates R1, R2 and R3: At any time within the duration of a symbol, the frequency of the symbol exceeds the requirements of the Separation as given in ITU table 7-4.
2. For data rates R1, R2 and R3: The measured $f_{\text{center}} + f_{\text{offset}}$ does not match with the calculated center frequency for the particular data rate with the precision as stated in ITU table 7-2.

3.4.6 Exception

When measuring the modulation and coding format, a transient frequency separation error for the first transmitted symbol in a data stream is allowed, this to cater for the initialization and regulation loop of the frequency synthesis of the Z-Wave device.

For each transmitted symbol, a transient overshoot/undershoot is allowed to exceed the requirements for the frequency separation given in ITU table 7-4 if the duration of the transient is $< 2/5^{\text{th}}$ of the expected frequency time:

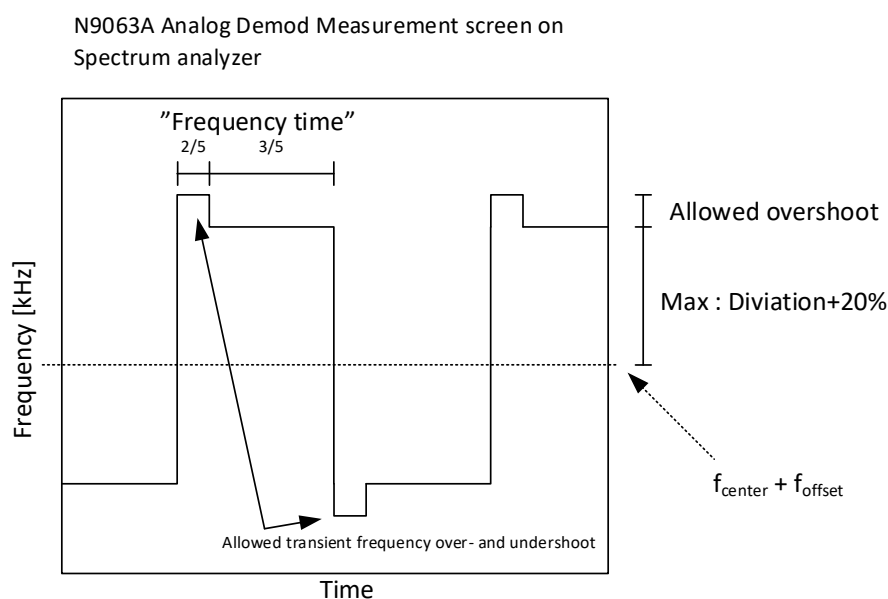


Figure 4, Frequency under/overshoot exception

3.5 Symbol mapping

Data bits transmitted by a Z-Wave device must be mapped / coded into RF frequencies according to the ITU tables 7-5 and 7-6.

The symbol mapping / coding for each of the data rates listed in ITU table 7-4 must be measured and verified.

3.5.1 Prerequisites

1. A Z-Wave device capable of transmitting a stream of modulated '10001000'_{binary} data bits at the rates defined in ITU table 7-2 and the modulation properties and coding properties given in ITU tables 7-4, 7-5 and 7-6.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A method to initialize the transmitted modulation type of the Z-Wave device, or pre-programmed Z-Wave devices to cover all listed RF profiles and data rates as listed in ITU table 7-1.
4. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.
5. An analog demodulator option installed on the spectrum analyzer with the capabilities of at least Keysight option "N9063A Analog Demod Measurement".

3.5.2 Measurement setup

The Z-Wave device must be initialized to transmit a constant stream of modulated RF signal at each RF profile as defined in ITU table 7-1. The data bits modulated must be a stream of '10001000'_{binary}. If test 3.2 pass, this test can be reduced to the following RF profiles: 1-3, 4-6 and 19-21 as defined in ITU table 7-1.

The Z-Wave device must be connected to a spectrum analyzer with a coaxial cable.

The spectrum analyzer should be initialized to below settings or a similar setting:

Table 4, Symbol mapping Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	200kHz
Resolution Bandwidth	1kHz
Video Bandwidth	Auto
Amplitude reference level	10dBm
Detector type	Average
Analog demodulation type	FSK
Demodulation time (time across screen)	Data rate R1: 2000us; Data rate R2: 500us; Data rate R3: 300uS
IF filter	700 kHz
Trigger option	RF burst

The symbol mapping properties of each data rate must be measured using the readings of the spectrum analyzer:

N9063A Analog Demod Measurement screen on
Spectrum analyzer

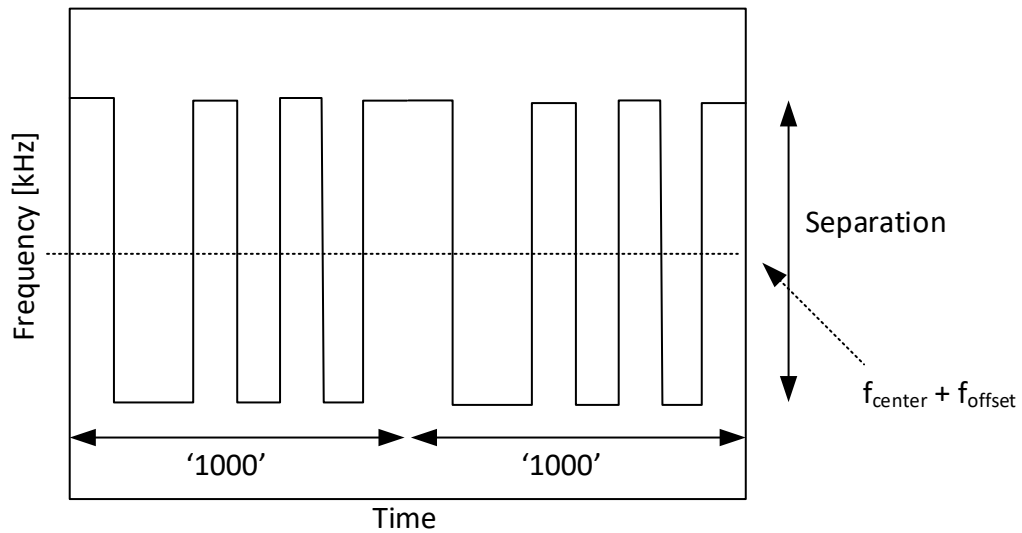


Figure 5, Symbol mapping measurement, FSK Data Rate R1, Manchester Coding.

N9063A Analog Demod Measurement screen on
Spectrum analyzer

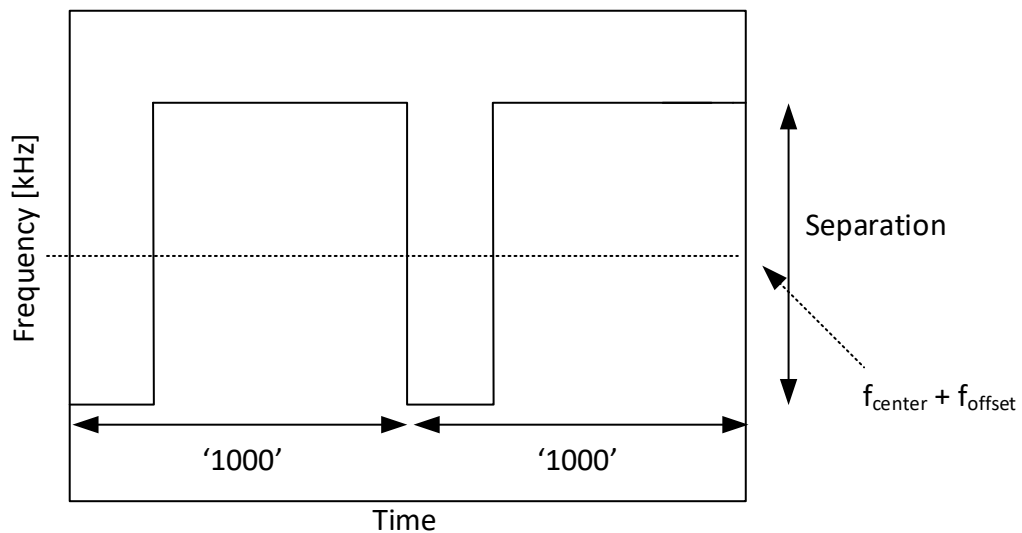


Figure 6, Symbol mapping measurement, FSK Data Rate R2, NRZ coding

N9063A Analog Demod Measurement screen on
Spectrum analyzer

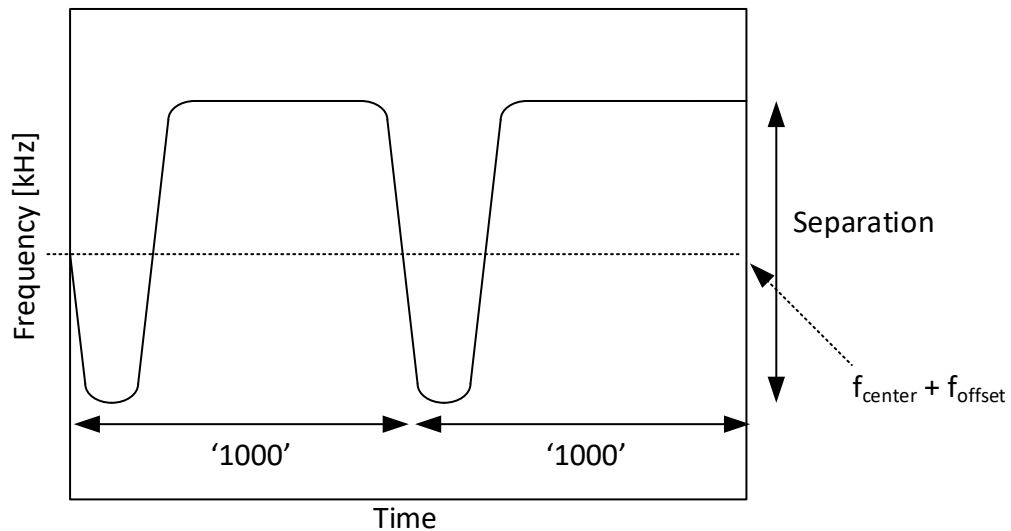


Figure 7, Symbol mapping measurement, FSK Data Rate R3, NRZ coding

3.5.3 Measurement result

For data rates R1, R2 and R3 the measurement result of the test is a clear pattern of the demodulated data stream identical to Figure 5, Figure 6 and Figure 7 and with frequency shifts according to ITU tables 7-5 and 7-6.

3.5.4 Pass criteria

The Z-Wave device shall pass the test if:

1. For data rate R1: The demodulated data stream has frequency shifts according to ITU table 7-6.
2. For data rates R2 and R3: The demodulated data stream has frequency shifts according to ITU table 7-5.

3.5.5 Fail criteria

The Z-Wave device shall fail the test if:

1. For data rate R1: The demodulated data stream has frequency shifts different from ITU table 7-6.
2. For data rates R2 and R3: The demodulated data stream has frequency shifts different from ITU table 7-5.

3.6 Transmit power adjustment

The RF output power transmitted by a Z-Wave device must be adjustable according to ITU section 7.1.2.5.2.

The output power adjustability must be measured and verified.

3.6.1 Prerequisites

1. A Z-Wave device capable of transmitting a CW RF signal at frequencies specified in ITU table 7-1.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A method to initialize the transmitted output power of the Z-Wave device, or pre-programmed Z-Wave devices to cover all possible output powers for the Z-Wave device.
4. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.

3.6.2 Measurement setup

The Z-Wave device must be initialized to transmit a CW RF signal at the nominal output power, denoted OP_{nom} at each RF profile as defined in ITU table 7-1. If the test 3.2 has been conducted and all RF profiles passed the test, a sub-set of RF profiles may be selected for this test: RF profiles 1-3; 4-6 and 19-21 as defined in ITU table 7-1.

The Z-Wave device must be connected to a spectrum analyzer with a coaxial cable.

The spectrum analyzer should be initialized to below or similar settings:

Table 5, Transmit power Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	1MHz
Resolution Bandwidth	300kHz
Video Bandwidth	Auto
Amplitude reference level	10dBm
Detector type	Max hold

A series of power measurements must now be performed for each of the possible output power settings of the Z-Wave device.

The measurements are performed using the “Peak search” functionality of the spectrum analyzer.

3.6.3 Measurement result

The measurement result will be a table showing the measured output power for each possible output power setting.

The relationship between the measured output powers must full fill the statements in the ITU section 7.1.2.5.2

3.6.4 Pass criteria

The Z-Wave device shall pass the test if:

1. It is possible to adjust the output power with a granularity of 2dB or better for power settings down to $OP_{nom} - 10\text{dB}$.
2. It is possible to adjust the output power down to a value less than or identical to $OP_{nom} - 20\text{dB}$.

3.6.5 Fail criteria

The Z-Wave device shall fail the test if:

1. It is not possible to adjust the output power with a granularity of 2dB or better for power settings down to $OP_{nom} - 10\text{dB}$.
2. It is not possible to adjust the output power down to a value less than or identical to $OP_{nom} - 20\text{dB}$.

3.7 Receiver sensitivity

The receiver of a Z-Wave must, under the test conditions given in ITU table 7-7, have a conducted sensitivity identical to or better than described in ITU table 7-8. The sensitivity measurements must be tested for all RF profiles listed in ITU table 7-1

3.7.1 Prerequisites

1. A Z-Wave device capable of receiving, decoding and error handling Z-Wave frames formatted according to ITU section 7.1.3. The Z-Wave device must be able to decode and data process at transmissions rates stated in ITU table 7-2. The Z-Wave device must be able to indicate when a frame is not correctly received. The Z-Wave receiver device is here after called DUT.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A Z-Wave transmitter, either a RF frequency generator which can transmit Z-Wave coded data messages or a golden Silicon Labs Z-Wave device. Data must be transmitted according to ITU tables 7-2 to 7-6 and formatted at described in ITU section 7.1.3. The output power of the transmitter must be adjustable to reach the power levels stated in ITU table 7-8 when measured at the input of the DUT. The Z-Wave transmitter is here after called test pattern generator.
4. A means to control the transmitted output power from the test pattern generator to the receiver DUT.
5. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.

3.7.2 Measurement setup

The Z-Wave receive device, the DUT, is connected to the Z-Wave pattern generator with a coax cable. The pattern generator transmits Z-Wave test packages back to back to the DUT. The number of correctly received packages and wrongly received packages must be recorded and the Frame Error Rate can be calculated:

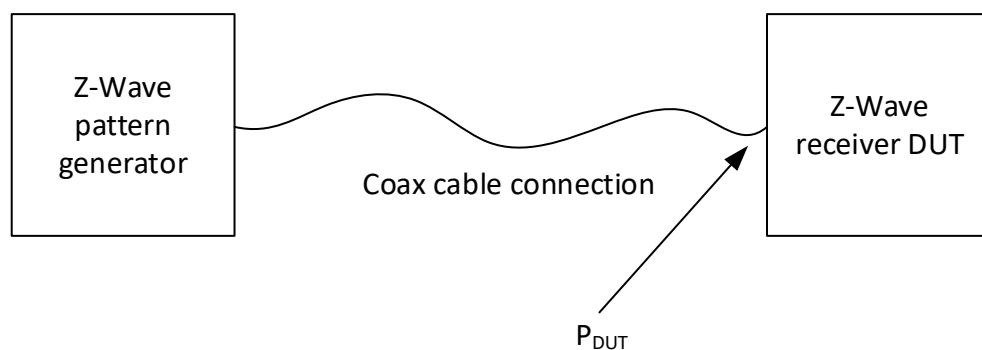


Figure 8, Sensitivity measurement setup

The received power at the Z-Wave DUT, P_{DUT} , must be adjusted to match the sensitivity requirements as stated in ITU table 7-8.

3.7.3 Measurement result

For each of the RF profile, at least 1000 frames must be transmitted by the test pattern generator and received by the DUT.

3.7.4 Pass criteria

The Z-Wave device shall pass the test if:

1. For each data rate and power setting given in ITU table 7-8, the frame error rate (FER) is < 0.01 :
$$\text{FER} = 1 - (\text{Number of correctly received frames} / \text{Number of transmitted frames})$$

3.7.5 Fail criteria

The Z-Wave device shall fail the test if:

1. For each data rate and power setting given in ITU table 7-8, the frame error rate (FER) is > 0.01 :
$$\text{FER} = 1 - (\text{Number of correctly received frames} / \text{Number of transmitted frames})$$

3.8 Clear channel assessment

The Z-Wave device must be able to sample the RF input level, judge the received power level, and only start to transmit if the received power level is less than what is stated in ITU section 7.1.2.5.4. The clear channel assessment must be tested RF profiles listed in ITU table 7-1 where the local RF authorities requires Clear Channel assessment, ie. RF profiles 19-21 and 25-27 according to ITU table 7-1.

3.8.1 Prerequisites

1. A Z-Wave device capable of both receiving and transmitting Z-Wave frames formatted according to ITU section 7.1.3. The Z-Wave device must be able to perform a clear channel assessment and transmit data if the level of received power is below the limit given in ITU section 7.1.2.5.4. The Z-Wave device is here after called DUT.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A RF frequency generator which can transmit a CW RF signal. The output power of the generator must be adjustable to reach the level stated in ITU section 7.1.2.5.4. when measured at the input of the DUT.
4. A means to control the transmitted CW signal power from the test pattern generator to the receiver DUT.
5. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.
6. A 3 port RF resistive power combiner.

3.8.2 Measurement setup

The DUT, RF generator and spectrum analyzer are all connected through the 3 port RF power combiner:

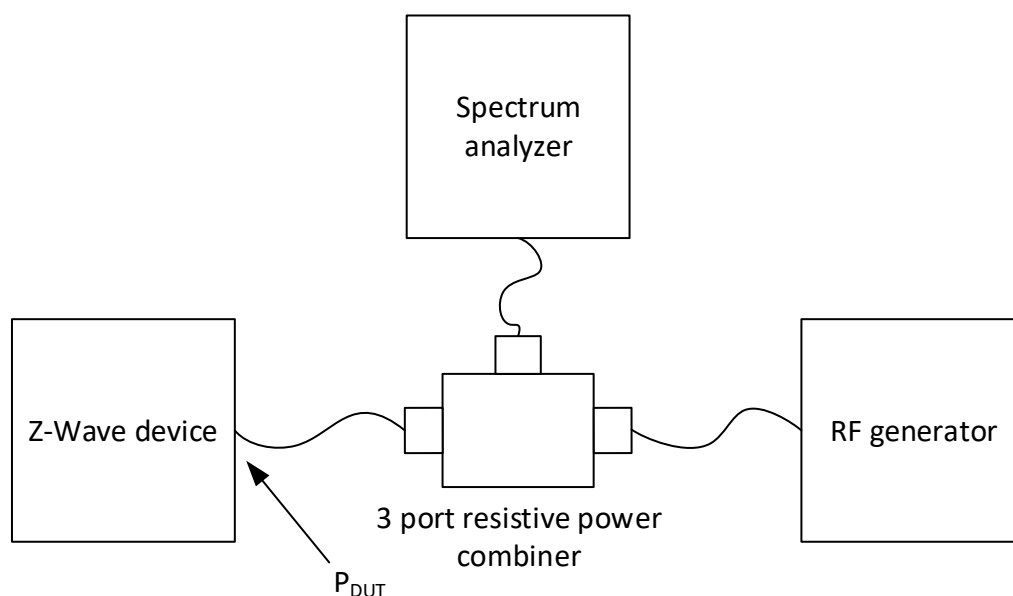


Figure 9, Clear channel assessment measurement setup

The spectrum analyzer should be initialized to:

Table 6, Clear channel assessment Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	Zero span
Resolution Bandwidth	0
Video Bandwidth	Auto
Amplitude reference level	Depending on P_{nominal}
Detector type	Clear/write
Trigger	RF burst
RF trigger level	-20dBm
Sweep Time	1 second

The Z-Wave device must be initialized to transmit Z-Wave data packets. The output level of the RF generator is adjusted around the threshold stated in ITU section 7.1.2.5.4. When the input power to the Z-Wave device is $<$ threshold, the Z-Wave device will transmit, and this will be captured by the spectrum analyzer. When the input to the Z-Wave device is $>$ threshold, the transmission of data from the Z-Wave device must stop:

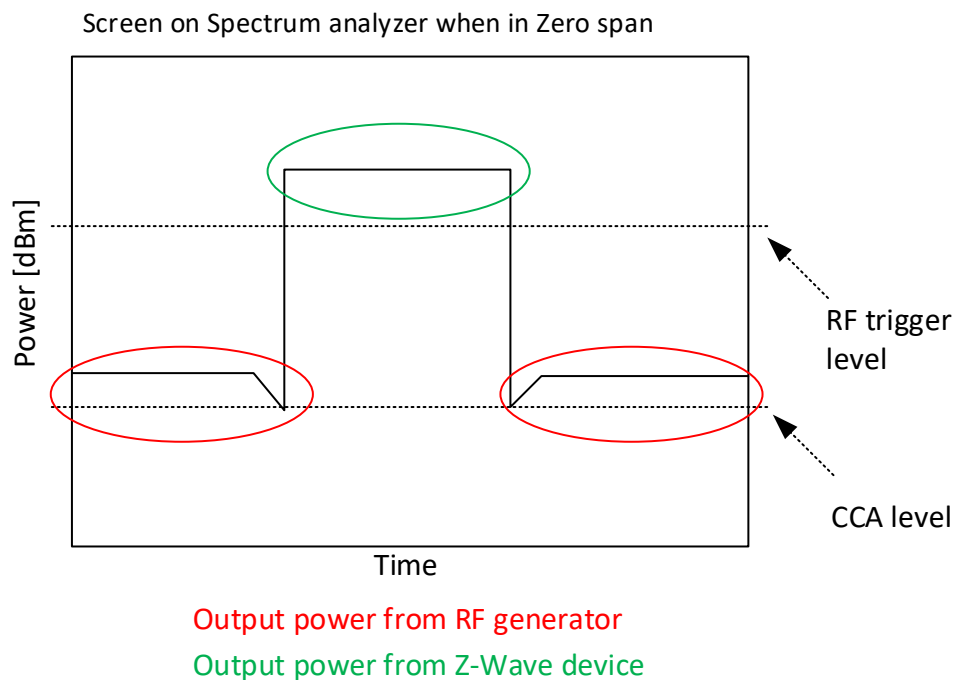


Figure 10, CCA spectrum analyzer measurement

3.8.3 Measurement result

The measurement result is an assessment of when the Z-Wave device starts to transmit Z-Wave frames given the output power of the RF generator.

3.8.4 Pass criteria

The Z-Wave device shall pass the test if:

1. Transmission of Z-Wave frames from the Z-Wave device starts when the input power to the Z-Wave device is < CCA threshold as stated in ITU section 7.1.2.5.4.

3.8.5 Fail criteria

The Z-Wave device shall fail the test if:

1. Transmission of Z-Wave frames from the Z-Wave device starts when the input power to the Z-Wave device is > CCA threshold as stated in ITU section 7.1.2.5.4.

3.8.6 Exception

The test of the DUT must show, that the DUT is able to enable the transmission based on the measured level of RF noise, but, the absolute level of noise is not important for this test. The absolute level of noise at which the CCA will be active will be tested by local RF authorities.

3.9 Receiver spurious requirement

A Z-Wave device in receive state may not desensitize other nearby Z-Wave receivers. The emitted LO leakage may thus not exceed the level stated in ITU section 7.1.2.5.5. The receiver spurious must be tested for all RF profiles listed in ITU table 7-1

3.9.1 Prerequisites

1. A Z-Wave device in constant receive state.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A method to initialize the receiver the Z-Wave device, or pre-programmed Z-Wave devices to cover all listed RF profiles and data rates as listed in ITU table 7-1.
4. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.

3.9.2 Measurement setup

The Z-Wave device must be connected to the spectrum analyzer with a coax cable.

The spectrum analyzer should be initialized to:

Table 7, Receiver spurious requirements Spectrum Analyzer settings

Spectrum analyzer parameter	Setting
f_{center}	f_{center} frequency according to ITU table 7-1
Span	2 MHz
Resolution Bandwidth	100kHz
Video Bandwidth	Auto
Amplitude reference level	-50dBm
Detector type	Max Hold

A receiver spurious signal is found by using the Peak Search functionality of the spectrum analyzer.

3.9.3 Measurement result

The measurement result is the power level of an RF spur found within the measurement bandwidth of the spectrum analyzer.

3.9.4 Pass criteria

The Z-Wave device shall pass the test if:

1. The highest found RF spur within the measurement bandwidth is < the limit stated in ITU section 7.1.2.5.5.

3.9.5 Fail criteria

The Z-Wave device shall fail the test if:

1. The highest found RF spur within the measurement bandwidth is > the limit stated in ITU section 7.1.2.5.5.

3.10 Receiver blocking

The receiver of a Z-Wave must be able to receive Z-Wave frames even when subjected to blocking CW RF signals transmitted by other RF devices. The level of the test Z-Wave RF communication must be set according to ITU section 7.1.2.5.6 and the frequency location and signal strength of the blocking CW RF signals must be adjusted to match the requirements given in ITU table 7-9. The blocking measurements must be tested for all RF profiles listed in ITU table 7-1.

3.10.1 Prerequisites

1. A Z-Wave device capable of receiving, decoding and error handling Z-Wave frames formatted according to ITU section 7.1.3. The Z-Wave device must be able to decode and data process at transmissions rates stated in ITU table 7-2. The Z-Wave device must be able to indicate when a frame is not correctly received. The Z-Wave receiver device is here after called DUT.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A Z-Wave transmitter, either a RF frequency generator which can transmit Z-Wave coded data messages or a golden Silicon Labs Z-Wave device. Data must be transmitted according to ITU tables 7-2 to 7-6 and formatted as described in ITU section 7.1.3. The output power of the transmitter must be adjustable to reach the power levels 3dB higher than stated in ITU table 7-8 when measured at the input of the DUT. The Z-Wave transmitter is here after called test pattern generator.
4. A means to control the transmitted output power from the test pattern generator to the receiver DUT.
5. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.
6. A CW RF generator to generate the interfering blocking signals at frequency locations and signal strengths described in ITU table 7-9 when measured at the input of the DUT. The frequency offsets stated in ITU table 7-9 are relative to the RF frequency of each RF profile in ITU table 7-1.
7. A 3 port resistive RF combiner.

3.10.2 Measurement setup

The Z-Wave receive device, the DUT, the Z-Wave pattern generator and the interfering CW RF generator are all connected to the 3 port RF combiner with coax cables. The pattern generator transmits Z-Wave test packages back to back to the DUT, and the output power of the pattern generator must be adjusted so that $P_{DUT_Z-Wave\ traffic}$ is 3dB above the level stated in ITU table 7-8 (please refer to Figure 11). The frequency of the CW RF generator is adjusted to: $f_{center\ frequency\ of\ RF\ profile_x\ in\ ITU\ table\ 7-1} \pm f_{frequency\ offset\ in\ ITU\ table\ 7-9}$, the amplitude is adjusted to the RF level as stated in ITU table 7-9 for each offset, and the RF level is $P_{DUT_blocking\ signal}$ when measured at the input of the DUT (please refer to Figure 11). Once the setup has been configured, for each frequency offset entry in ITU table 7-9, the number of correctly received packages and wrongly received packages must be recorded and the Frame Error Rate can be calculated. The measurement setup is shown in Figure 11 below:

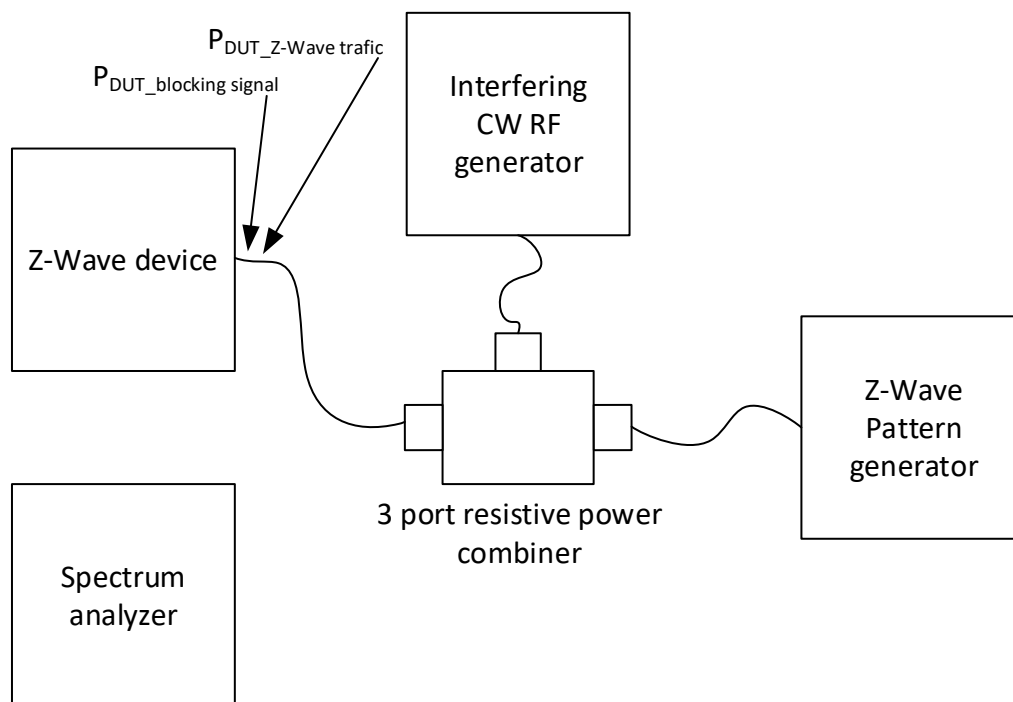


Figure 11, Blocking measurement setup

The RF levels $P_{DUT_Z-Wave\ traffic}$ and $P_{DUT_blocking\ signal}$ must be verified, and for this, the coax connection between the Z-Wave device and the 3 port combiner can be disconnected and the 3 port combiner can be connected to the spectrum analyzer for RF power level verification and RF CW interferer frequency verification.

3.10.3 Measurement result

For each of the RF profiles in ITU table 7-1 and frequency offsets in ITU table 7-9, at least 1000 frames must be transmitted by the test pattern generator and received by the DUT.

The test results will be a series of test observations which should include the following data:

(RF profile; Frequency offset; Number of frames with errors received; Number of frames transmitted)

For each (RF profile, Frequency offset), the frame error rate must be calculated, and the result must be below the criterion stated in ITU table 7-7.

3.10.4 Pass criteria

The Z-Wave device shall pass the test if:

1. For each RF profile and Frequency offset given in ITU table 7-9, the frame error rate (FER) is < 0.01:

$$FER = 1 - (\text{Number of correctly received frames} / \text{Number of transmitted frames})$$

3.10.5 Fail criteria

The Z-Wave device shall fail the test if:

1. Any RF profile and Frequency offset given in ITU table 7-9, has a frame error rate (FER) which is > 0.01:

$$\text{FER} = 1 - (\text{Number of correctly received frames} / \text{Number of transmitted frames})$$

3.10.6 Exception

To cater for the location of the Local Oscillator Frequency in the receiver with respect to the blocking frequency, the DUT may fail the test at one frequency offset pr. RF profile.

3.11 Receiver saturation

The receiver of a Z-Wave must be able to receive Z-Wave frames transmitted at RF levels as described under the test conditions given in ITU section 7.1.2.5.7. The receiver saturation measurements must be tested for all RF profiles listed in ITU table 7-1.

3.11.1 Prerequisites

1. A Z-Wave device capable of receiving, decoding and error handling Z-Wave frames formatted according to ITU section 7.1.3. The Z-Wave device must be able to decode and data process at transmissions rates stated in ITU table 7-2. The Z-Wave device must be able to indicate when a frame is not correctly received. The Z-Wave receiver device is here after called DUT.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. A Z-Wave transmitter, either a RF frequency generator which can transmit Z-Wave coded data messages or a golden Silicon Labs Z-Wave device. Data must be transmitted according to ITU tables 7-2 to 7-6 and formatted at described in ITU section 7.1.3. The output power of the transmitter must be adjustable to reach the power level stated in ITU section 7.1.2.5.7 when measured at the input of the DUT. The Z-Wave transmitter is here after called test pattern generator.
4. A means to control the transmitted output power from the test pattern generator to the receiver DUT.
5. A spectrum analyzer with better or identical specifications to a Keysight CXA N9000A, 7.5GHz.

3.11.2 Measurement setup

The Z-Wave receive device, the DUT, is connected to the Z-Wave pattern generator with a coax cable. The pattern generator transmits Z-Wave test packages back-to-back to the DUT. The number of correctly received packages and wrongly received packages must be recorded and the Frame Error Rate can be calculated:

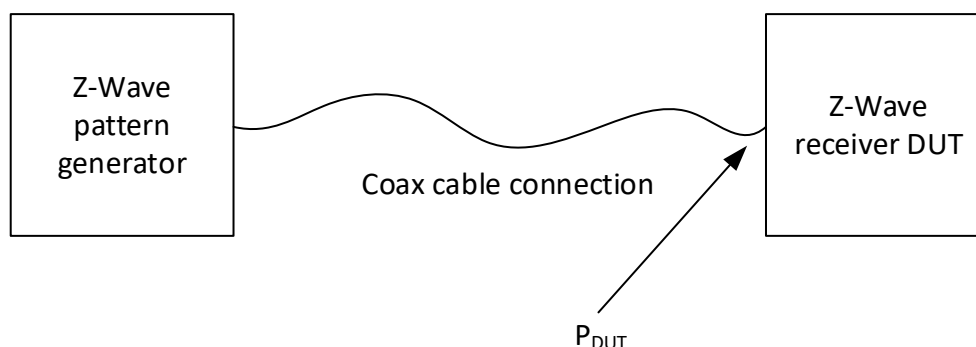


Figure 12, Receiver saturation measurement setup

The received power at the Z-Wave DUT, P_{DUT} , must be adjusted to match the RF level as stated in ITU section 7.1.2.5.7.

3.11.3 Measurement result

For each of the RF profile, at least 1000 frames must be transmitted by the test pattern generator and received by the DUT at the RF level stated in ITU section 7.1.2.5.7.

The measurement result is the number of correctly and wrongly received Z-Wave frames for each RF profile.

3.11.4 Pass criteria

The Z-Wave device shall pass the test if:

1. For each RF profile in ITU table 7-1, the frame error rate (FER) is < 0.01 :
$$\text{FER} = 1 - (\text{Number of correctly received frames} / \text{Number of transmitted frames})$$
at the input power level stated in ITU section 7.1.2.5.7.

3.11.5 Fail criteria

The Z-Wave device shall fail the test if:

1. Any RF profile given in ITU table 7-1, the frame error rate (FER) is > 0.01 :
$$\text{FER} = 1 - (\text{Number of correctly received frames} / \text{Number of transmitted frames})$$
at the input power level stated in ITU section 7.1.2.5.7.

3.12 TX to RX turnaround time

The transceiver of a Z-Wave device must be fast enough to switch from transmission mode to receive mode, the so-called TX-to-RX turnaround time. The TX-to-RX turnaround time must be measured under the test conditions given in ITU section 7.1.2.5.8. The TX-to-RX turnaround time measurements must be tested for all RF profiles listed in ITU table 7-1.

3.12.1 Prerequisites

1. A Z-Wave device capable of transmitting and receiving, decoding and error handling Z-Wave frames formatted according to ITU section 7.1.3. The Z-Wave device must be able to decode and data process at transmissions rates stated in ITU table 7-2. The Z-Wave device must be able to indicate when a frame is not correctly received, and all incoming Z-Wave frames must be acknowledged. The Z-Wave device must set a GPIO, available for measurements with an oscilloscope, to a state when leaving its transmission state and reverse the state of the GPIO when the receiver of the Z-Wave device is fully initialized and ready to receive preamble-bits from a Z-Wave frame. The Z-Wave receiver device is here after called DUT.
2. The Z-Wave device must be mounted on a PCB enabling a cabled RF connection between a RF measurement device and a 50 Ohms matched output of the Z-Wave device.
3. The PCB must further enable a measurement using an oscilloscope on the designated GPIO pin used for measuring TX-to-RX turnaround time measurements.
4. A golden Silicon Labs Z-Wave device which can transmit and receive Z-Wave coded data messages. Data must be transmitted according to ITU tables 7-2 to 7-6 and formatted at described in ITU section 7.1.3. The test pattern generator must acknowledge all incoming Z-Wave traffic. The Z-Wave transmitter is here after called test pattern generator.
5. A means to control the transmission of a Z-Wave frame from the pattern generator.
6. An oscilloscope, equivalent to a R&S RTO 1204 or better.

3.12.2 Measurement setup

The DUT and the Z-Wave pattern generator are connected to each other through a coax cable. The oscilloscope is connected to the GPIO pin of the DUT. The Z-Wave pattern generator is started, and the pulse widths of the pulsing GPIO pin is measured with the oscilloscope.

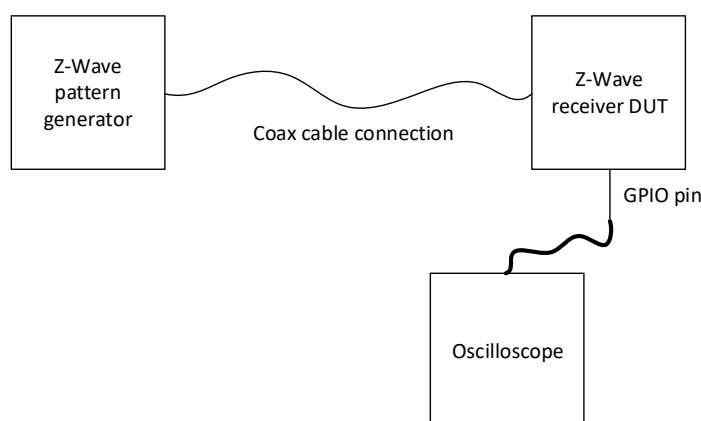


Figure 13, TX-to-RX turnaround time setup

Table 8, Oscilloscope settings for TX-to-RX turnaround measurements

Spectrum analyzer parameter	Setting
V/div	1
Time Base	200us
Trigger	Edge triggered

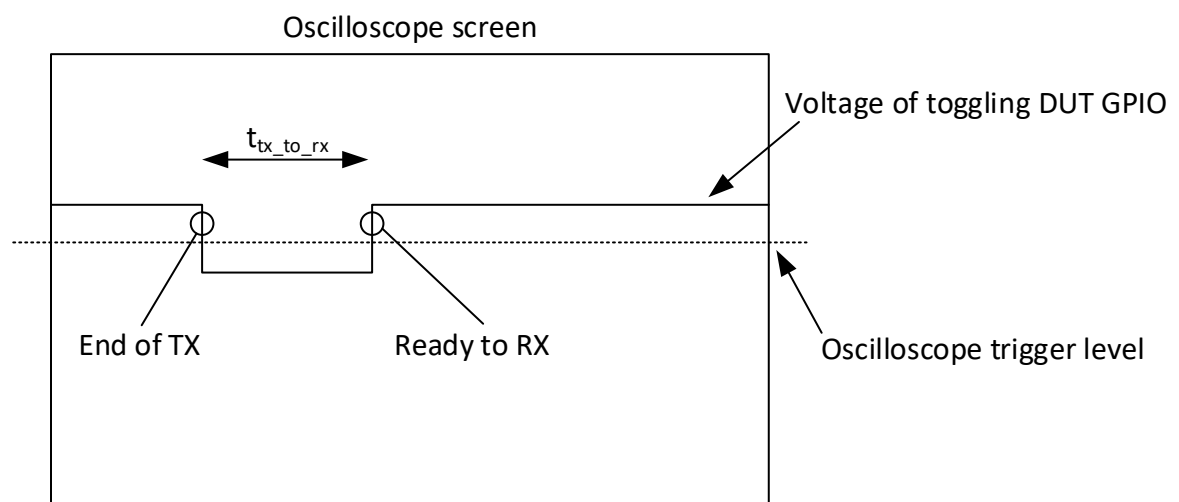


Figure 14, TX-to-RX turnaround measurement result

The number of transmitted frames from the Z-Wave pattern generator as well as the number of received frames at the DUT must be recorded.

Note: If another method for measuring TX-to-RX turn-around time is possible, e.g. using a spectrum analyzer in zero-span, this method is allowed to be used as well.

3.12.3 Measurement result

The measurement result is the duration, $t_{tx_to_rx}$ in Figure 14, of the state change of the GPIO pin of the DUT during the communication between the DUT and the Z-Wave pattern generator measured for at least 10 state changes.

The DUT must have received and acknowledged all the frames transmitted by the Z-Wave pattern generator.

3.12.4 Pass criteria

The Z-Wave device shall pass the test if:

1. The TX-to-RX turnaround time, $t_{tx_to_rx}$ measured at least 10 times are less than stated in ITU table 7-27 and all transmitted frames by the Z-Wave generator were received and acknowledged by the Z-Wave device.

3.12.5 Fail criteria

The Z-Wave device shall fail the test if:

1. Any of 10 sampled TX-to-RX turnaround times, $t_{tx_to_rx}$ for at least 10 samples were higher than stated in ITU table 7-27 or not all transmitted frames by the Z-Wave generator were received and acknowledged by the Z-Wave device.

3.13 RX-to-TX turnaround time

The response time of the transceiver of a Z-Wave device must be fast enough to switch from receive mode to transmit mode, the so-called RX-to-TX turnaround time. The RX-to-TX turnaround time must be measured under the test conditions given in ITU section 7.1.2.5.9. The RX-to-TX turnaround time measurements must be tested for all RF profiles listed in ITU table 7-1. RX-to-TX turnaround times are depending on the MAC layer implementation and is thus not a part of a PHY test.

3.14 Preamble field

Data frames transmitted by a Z-Wave device be formatted as described in ITU section 7.1.3.1: With a preamble field, a Start of Frame delimiter, payload and an End of Frame delimiter. The requirements for the number of preamble bytes to transmit are stated in ITU table 7-10.

The preambles are coded according to ITU tables 7-2, 7-4, 7-5 and 7-6.

The number of preamble types transmitted for each type of Z-Wave frame must be tested according to ITU table 7-10 and tested for all RF profiles listed in ITU table 7-1. Preambles are inserted into Z-Wave frames by the MAC layer and is thus not a part of a PHY test.

3.15 Start of Frame field

The transceiver of a Z-Wave must be able to correctly transmit and correctly receive Z-Wave start of frame information as described in ITU section 7.1.3.3. The data content of the Start of Frame field is described in ITU table 7-11. The handling of Start of Frame field in Z-Wave frames must be tested for all RF profiles listed in ITU table 7-1. Start of Frame is inserted into Z-Wave frames by the MAC layer and is thus not a part of a PHY test.

3.16 End of Frame field

Data frames transmitted by a Z-Wave device must be formatted as described in ITU section 7.1.3.1: With a preamble field, a Start of Frame delimiter, payload and an End of Frame delimiter. If the Z-Wave packet is transmitted with the data rate R1, the requirements for End of Frame field is given in ITU section 7.13.5.

The End of Frame delimiter for data rate R1 must be tested for all RF profiles listed in ITU table 7-1. The End of Frame field is inserted into Z-Wave frames by the MAC layer and is thus not a part of a PHY test.

REFERENCES

- [1] ITU-T, G9959 (01/2015)

4 APPENDIX

4.1 Frequency, channel, and data rate overview

Frequency Plan	Channel Config *	Center Frequency (MHz)			Data Rate *		
		F ₁	F ₂	F ₃	F ₁	F ₂	F ₃
ANZ	2	919.80	921.40	--	R3	R2+R1	--
CN	2	868.40	--	--	R1+R2+R3	--	--
EU	2	869.85	868.40	--	R3	R2+R1	--
HK	2	919.80	919.80	--	R3	R2+R1	--
IL	2	916.00	--	--	R1+R2+R3	--	--
IN	2	865.20	--	--	R1+R2+R3	--	--
JP	3	922.50	923.90	926.30	R3	R3	R3
KR	3	920.90	921.70	923.10	R3	R3	R3
RU	2	869.00	--	--	R1+R2+R3	--	--
US	2	916.00	908.40	--	R3	R2+R1	--
* Refer to ITU-T 9.99.59							